

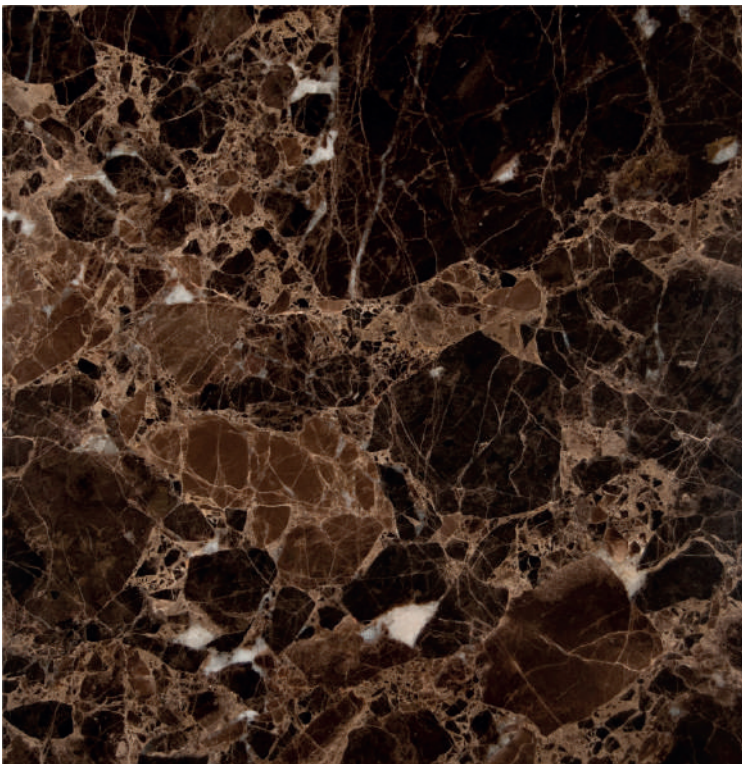


M A R T E K





INTERNATIONAL

depuis 1996

EMPERADOR DARK



Compressive strenght	154.9 MPa
After freezing	155.3 MPa
Flexural strenght	20.6 MPa
Porosity	
Water absorption	0.40 %
Impact test	35 cm
Wear test	1.90 mm
Bulk density	2702 Kg / m3

 Quarry location :	Spain
 Availability :	Limited
 Block size dimensions :	Medium/Large
 Rate of change slab/photo :	Limited

MARTEK International

- T : (33)04 91 46 70 01 - M : (33)06 73 76 29 46 – contact@martek-international.com

- www.martek-international.com -

