

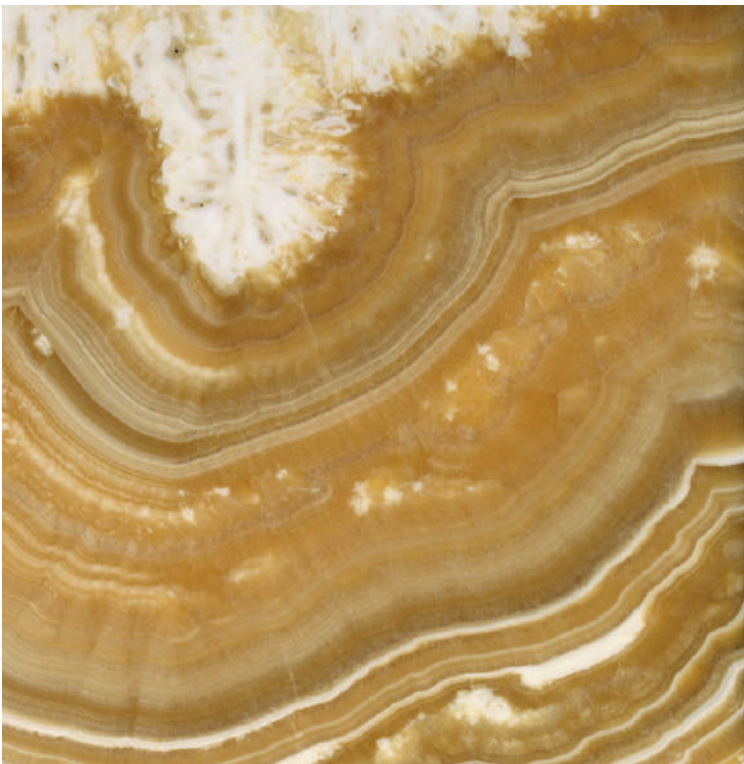


M A R T E K





INTERNATIONAL

depuis 1996

ONYX ORANGE



Compressive strenght	172.6 MPa
After freezing	160.8 MPa
Flexural strenght	
Porosity	
Water absorption	0.15 %
Impact test	
Wear test	
Bulk density	2550 Kg / m3

 Quarry location :	Iran
 Availability :	Limited
 Block size dimensions :	Small/Medium
 Rate of change slab/photo :	Medium

MARTEK International

- T : (33)04 91 46 70 01 - M : (33)06 73 76 29 46 – contact@martek-international.com

- www.martek-international.com -

