

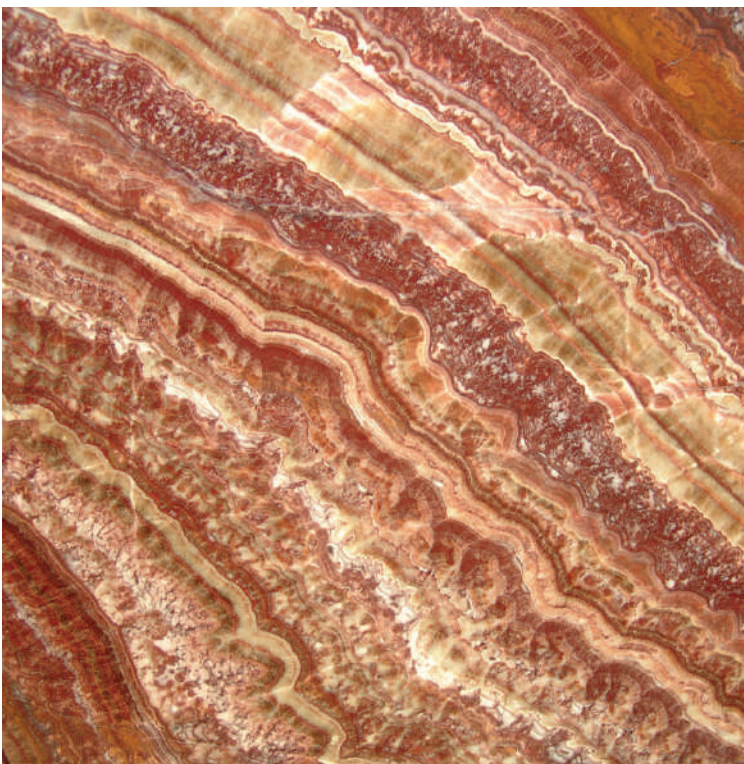


M A R T E K





INTERNATIONAL

depuis 1996

## ONYX RED



Compressive strenght	92.18 MPa
After freezing	90.7 MPa
Flexural strenght	12.26 MPa
Porosity	
Water absorption	0.13 %
Impact test	
Wear test	
Bulk density	2430 Kg / m3

 Quarry location :	Mexico
 Availability :	Medium
 Block size dimensions :	Small/Medium
 Rate of change slab/photo :	Medium

**MARTEK International**

- T : (33)04 91 46 70 01 - M : (33)06 73 76 29 46 – [contact@martek-international.com](mailto:contact@martek-international.com)

- [www.martek-international.com](http://www.martek-international.com) -

